

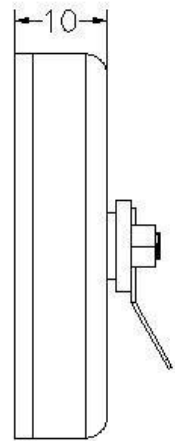


# AMT : YDG40-01A

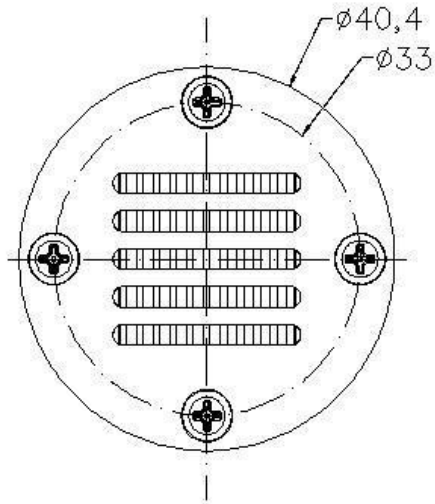

Rated Impedance	4 (8) $\Omega$	Front Panel	Aluminum
Sensitivity	89dB	Finish of Panel	Powder coat
Frequency Range	3k~40k Hz	Diaphragm	KAPTON
RMS Power	15W	Conductive Line	Alumium foil
Max Power	30W	Magnet	Neodymium
Lowest crossover	3.5k Hz(recommend)	Terminal (mm)	4.8*0.5 (+) ;2.8*0.5 (-)
		Net weight	58g
		Package	200pcs/Carton
		N/G.W. / Carton	15.5kg
		Demension/ carton	485*445*190(mm)

## SPL vs Freq

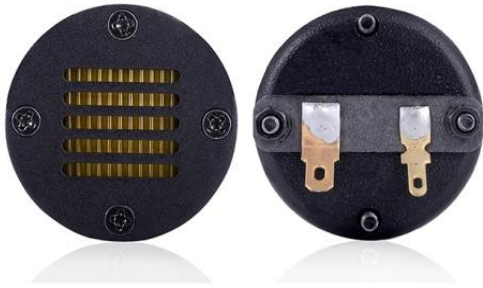